

YT1260 Series

Introduction

- ROHS, Halogen Free and REACH compliance
- High rated current
- 125°C maximum total temperature operation
- 13.8×12.9×6.0mm maximum surface mount package
- Low core loss
- Ultra low buzz noise due to molding construction

Applications


- Laptops and PCs
- Switch and servers
- Base stations
- DC/DC converters
- Battery powered devices
- SSD modules

Product Identification

YT 1260 --1R5 M
 ① ② ③ ④

- ① YT ----- Series name
- ② 1260 ----- Dimension
- ③ 1R5 ----- Inductance Value ($1R5 = 1.5\mu H$)
- ④ M ----- Inductance Tolerance ($M = \pm 20\%$)

Dimensions (unit:mm)

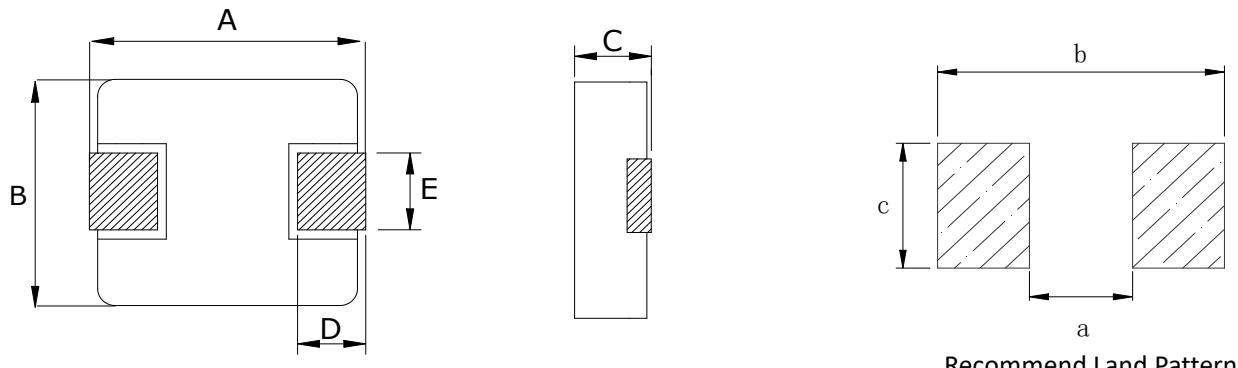

A	B	C	D	E	a typ	b typ	c typ
13.45 ± 0.35	12.6 ± 0.3	5.8 ± 0.2	2.0 ± 0.5	5.0 ± 0.3	8	14.5	5.5

Part No.	Inductance	DC Resistance	Saturation Current	Heating Rating Current
	L0 (μ H)	DCR (m Ω)	Isat (A)	Irms (A)
	$\pm 20\%$, 100 kHz, 1V	MAX.	TYP.	TYP.
YT1260-4R7M-E50	4.7	9	24	15
YT1260-5R6M-E50	5.6	11	22.5	13
YT1260-6R8M-E50	6.8	13.5	19	12
YT1260-8R2M-E50	8.2	16	13.5	11
YT1260-100M-E50	10	20.7	12.5	10
YT1260-120M-E50	12	23	10	9
YT1260-150M-E50	15	29	9	8.5
YT1260-180M-E50	18	35	8	7.5
YT1260-220M-E50	22	39.5	7.5	7
YT1260-270M-E50	27	56	6.5	6
YT1260-330M-E50	33	75	6	5.5
YT1260-470M-E50	47	90	5.5	5
YT1260-680M-E50	68	140	4.5	4
YT1260-101M-E50	100	200	3.5	3
YT1260-121M-E50	120	235	3.2	2
YT1260-151M-E50	150	350	2.7	1.5

Notes

1. All test data is referenced to 25 °C ambient.
2. Operating temperature range - 55 °C to + 125 °C
3. Irms (A):DC current (A) that will cause an approximate ΔT of 40 °C(reference ambient temperature is 25 °C).
4. Isat(A):DC current (A) that will cause L0 to drop approximately 30 %.
5. The part temperature (ambient + temp rise) should not exceed 125 °C under worst case operating conditions. Circuit design, component placement, PWB trace size and thickness, airflow and other cooling provisions all affect the part temperature. Part temperature should be verified in the end application.