

YT1770 Series

Introduction

- ROHS, Halogen Free and REACH compliance
- High rated current
- 125°C maximum total temperature operation
- 17.5×17.15×7.0mm maximum surface mount package
- Low core loss
- Ultra low buzz noise due to molding construction

Applications


- Laptops and PCs
- Switch and servers
- Base stations
- DC/DC converters
- Battery powered devices
- SSD modules

Product Identification

YT 1770 --2R2 M
 ① ② ③ ④

- ① YT ----- Series name
- ② 1770 ----- Dimension
- ③ 2R2 ----- Inductance Value (2R2 = 2.2μH)
- ④ M -----Inductance Tolerance (M= ± 20%)

Dimensions (unit:mm)

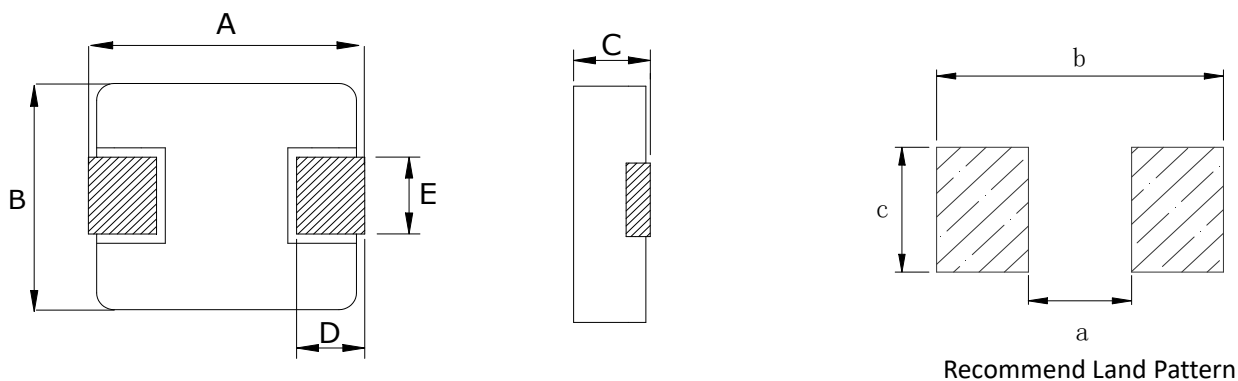

A	B	C	D	E	a typ	b typ	c typ
17.15±0.35	17.15MAX	7.0MAX	2.5±0.5	12.0±0.3	11.2	18.2	12.8

rt No.	Inductance	DC Resistance	Saturation Current	Heating Rating Current
	L0 (μH)	DCR (mΩ)	Isat (A)	Irms (A)
	±20 %, 100 kHz, 1V	MAX.	TYP.	TYP.
YT1770-2R2M	2.2	2.5	34	29
YT1770-3R3M	3.3	3.95	30	24
YT1770-4R7M	4.7	4.75	24	21
YT1770-6R8M	6.8	7.5	22	17
YT1770-8R2M	8.2	8.7	20	13
YT1770-100M	10	9.9	19	12
YT1770-150M	15	17	14.5	11
YT1770-220M	22	23	11.5	8.5
YT1770-330M	33	37	10	8
YT1770-470M	47	47	7.5	6
YT1770-680M	68	85	6.5	5.2
YT1770-101M	100	130	5	3.7

Notes

1. All test data is referenced to 25 °C ambient.
2. Operating temperature range - 55 °C to + 125 °C.
3. Irms (A):DC current (A) that will cause an approximate ΔT of 40 °C(reference ambient temperature is 25 °C).
4. Isat(A):DC current (A) that will cause L0 to drop approximately 30 %.
5. The part temperature (ambient + temp rise) should not exceed 125 °C under worst case operating conditions. Circuit design, component placement, PWB trace size and thickness, airflow and other cooling provisions all affect the part temperature. Part temperature should be verified in the end application.